

# RH200B

## 230V Gearmotor

Supporting pole diameter


60 mm e 48/42 mm  
(with adapter)

Spring boxes diameter

200/220 mm

Lifting capacity

280 Kg

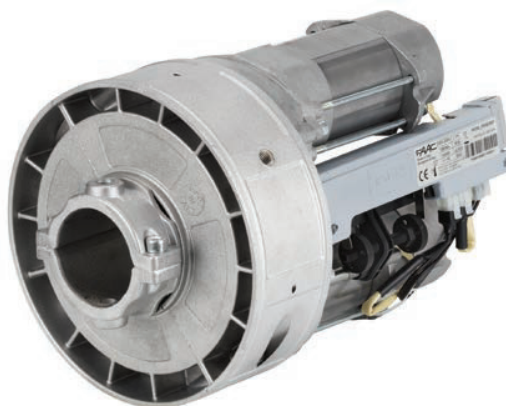

### DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	RH200B / RH200B EF
Power supply voltage	220-240V ~ 50/60Hz
Max. torque	280 Nm (*)
Operating ambient temperature	-20°C ÷ + 55°C
Lifting capacity	280 Kg (*)
Max speed	9 rpm (*)
Supporting pole diameter	60 mm and 48/42 mm (add accessory 391452)
Spring boxes diameter	200/220 mm
Max. rolling shutter height	6 m
Max. rolling shutter width	4.5 m
Operator weight	12.5 Kg
Electronic equipment	Not included

(\*) data referred to 230V~ 50Hz

## FAMILY MODELS

Model	Item code
RH200B REVERSIBLE	109960
RH200B EF	109961

## PACKS

**RH200B includes:** a gearmotor, adapters for spring boxes 200/220, accessories for installation.  
The EF versions include the electric brake (built in).

Typical Installation Examples page. 351

## ELECTRONIC CONTROL UNITS



Electronic control board  
200MPS  
Info at page 154  
790905

## ACCESSORIES



Enclosure mod. E for  
electronic control units

720119



Electric brake Kit ♦

391450



Pole adapter 60 > 48/42  
mm

391452

>>



Parachute for crown  
200-220

391454



XK30 Key selector with  
lever release

391456



Spring adapter 200 >  
220 mm

391453

## NOTE

♦ for external release use the anti-burglar key selector with lever release  
code 391456

## OTHER ACCESSORIES

Key operated  
buttons  
page 176

Safety edges  
page 187

Transmitters  
and receivers  
page 168

Photocells and  
columns  
page 184

Flashing lights  
page 194

Various  
accessories  
page 195