

# RH240B

## 230V Gearmotor

Supporting pole diameter


76 mm

Spring boxes diameter

240 mm

Lifting capacity

360 Kg

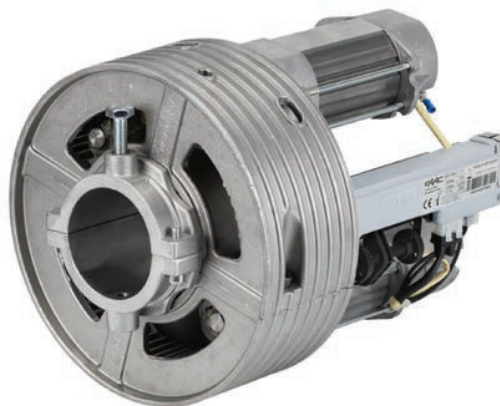

### DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	RH240B EF SUPER
Power supply voltage	220-240V ~ 50/60Hz
Max. torque	420 Nm (*)
Operating ambient temperature	-20°C ÷ + 55°C
Lifting capacity	360 Kg (*)
Max speed	9 rpm (*)
Supporting pole diameter	76 mm
Spring boxes diameter	240 mm
Max. rolling shutter height	6 m
Max. rolling shutter width	4.5 m
Operator weight	17 Kg
Electronic equipment	Not included

(\*) data referred to 230V~ 50Hz

## FAMILY MODELS

Model	Item code
RH240B EF SUPER	109981

## PACKS

**RH240B EF SUPER includes:** a gearmotor equipped with electric brake and installation accessories.

Typical Installation Examples page. 352

## ELECTRONIC CONTROL UNITS



Electronic control board  
200MPS  
Info at page 154  
790905

## ACCESSORIES



Enclosure mod. E for  
electronic control units

720119



Electric brake Kit ♦

391450



XK30 Key selector with  
lever release

391456

>>



Parachute for crown  
240

391455

## NOTE

♦ For external release use the anti-burglar key selector with lever release code 391456

### OTHER ACCESSORIES

Key operated  
buttons  
page 176

Safety edges  
page 187

Transmitters  
and receivers  
page 168

Photocells and  
columns  
page 184

Flashing lights  
page 194

Various  
accessories  
page 195