

RL200

230V Gearmotor

Supporting pole diameter


60 mm e 48/42 mm
(with adapter)

Spring boxes diameter

200/220 mm

Lifting capacity

170 Kg

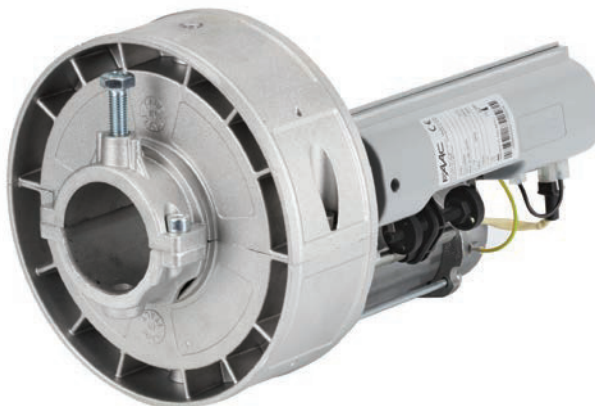

DIMENSIONS AND TECHNICAL SPECIFICATIONS

Model	RL200 / RL200 EF
Power supply voltage	220-240V ~ 50/60Hz
Max. torque	170 Nm (*)
Operating ambient temperature	-20°C ÷ + 55°C
Lifting capacity	170 Kg (*)
Max speed	10 rpm (*)
Supporting pole diameter	60 mm and 48/42 mm (with accessory cod. 391452)
Spring boxes diameter	200/220 mm
Max. rolling shutter height	6 m
Max. rolling shutter width	4.5 m
Operator weight	8 Kg
Electronic equipment	Not included

(*) data referred to 230V~ 50Hz

FAMILY MODELS

Model	Item code
RL200 REVERSIBILE	109950
RL200 EF	109951
RL 200 EF 115V	1099511

PACKS

RL220 includes: a gearmotor, adapters for spring boxes 200/220, accessories for installation.
The EF versions include the electric brake (built in).

Typical Installation Examples page. 340

ELECTRONIC CONTROL UNITS



Electronic control board
200MPS
Info at page 156

790905

ACCESSORIES



Enclosure mod. E for
electronic control
units

720119



Electric brake Kit ♦

391450



Pole adapter 60 > 48/42
mm

391452

>>



Parachute for crown
200-220

391454



XK30 Key selector with
lever release

391456



Spring adapter 200 >
220 mm

391453



Electric brake Kit
115V ♦

3914501

NOTE

♦ for external release use the anti-burglar key selector with lever release
code 391456

OTHER ACCESSORIES

Key operated
buttons
page 174

Safety devices
page 186

Transmitters and
receivers
page 166

Photocells and
columns
page 183

Flashing lights
page 194

Various
accessories
page 195